


Operating Instructions – Hot Well Controller

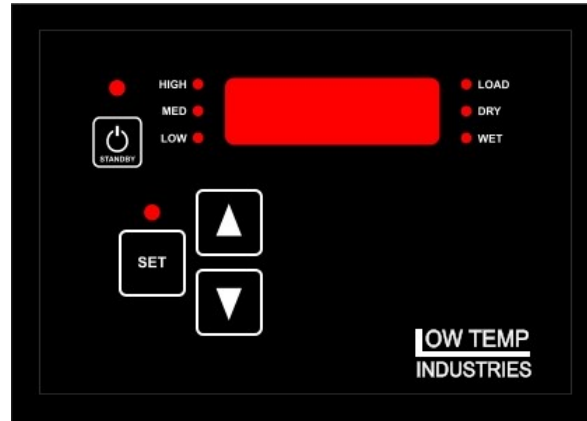

General

The hot well controller has a STANDBY feature allowing easy management of power to individual food wells. When the instrument panel power switch is turned on each food well starts in STANDBY mode.

Heat settings can be programmed for each food well. Each controller will remember its settings for easy reuse.

Key Presses

There are two types of key selection methods – short-press and long-press. A short-press is a momentary push and release of a key. A long-press is to push a key and hold it for one second then release it.

STANDBY

At the upper-left of the controller face is the STANDBY key and the STANDBY LED. When the STANDBY LED is lighted the food well is idle.

- Long-press the STANDBY key to turn on the food well.

Heating

The food well will automatically start heating to the programmed setting. The programmed setting, 1 through 6, will display while heating.

LED LOAD

The LOAD LED indicates when the controller calls for heat.

Programming HEAT

- Make sure the food well is operating (not in STANDBY).
- Long-press the SET key.
- The SET LED will blink while programming.
- Use arrow keys to modify the setting; range 1 through 6.
- Long-press the SET key to exit programming.